







HYPERDRIVE HD1

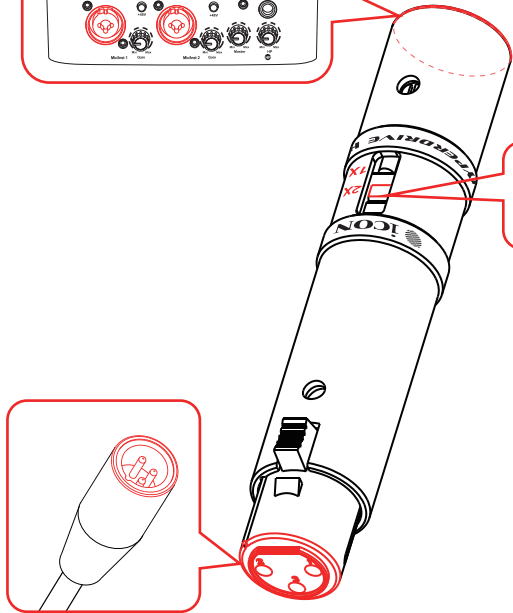




Gain: 1X 23dB
2X 46dB
(1K Ohms)

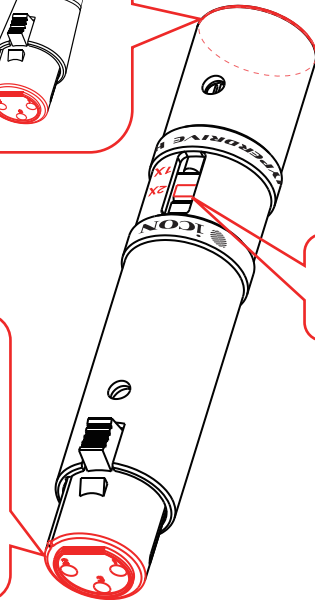

Gain: 1X 23dB
2X 46dB
(1K Ohms)



Specifications

Frequency Range..... 10Hz - 120K Hz

Output noise level.....1X 0.9uV
2X 1.8mV

Gain.....1X 23dB
2X 46dB (1K Ohms)

Powering..... 48V phantom power

Recommended
load impedance.....>1K Ohms

Current consumption..... 3.0mA

Connectivity..... 3-pin male/famale
XLR connector



中国地区用户



www.iconproaudio.com